
SG-PRA 2-28-13

## Maximum Security Grilles and Registers

Model: ☐ SG-PRA • Aluminum • Round Perforated

## **General Construction**

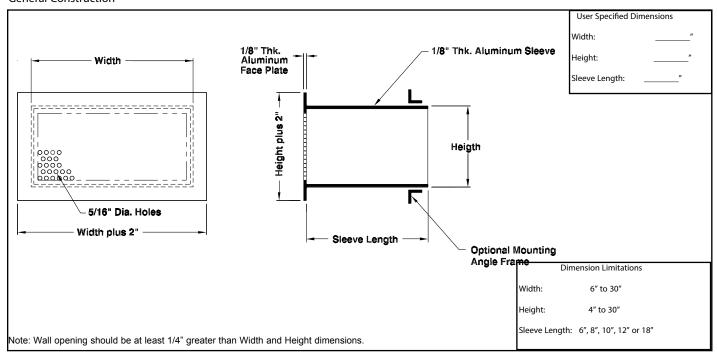

Angle Frame Shipped Loose for Field Welding 1 1/2" x 1 1/2" x 1/8" aluminum angle iron welded together for field installation. Frame is mill finish.
Anchor Bars 1/2" diameter aluminum bars, 3" in height. Positioned three inches from back of face plate on top and bottom of sleeve.

**Options and Accessories** 

Face Operated Damper
AG-15-AA aluminum opposed blade damper. Slot operated from face of the grille.

Rear Operated Damper
AG-15-AA aluminum opposed blade damper. Slot operated from rear of the grille.

Sleeve Barrier Grille

Constructed of 1/2" diameter aluminum bars with maxi-

#04 Mill Finish

mum 6" opening.

## General Description

The TITUS model SG-PRA is a maximum security grille. The design of the grille allows a greater effective free area and air flow without compromising security and safety.

The TITUS model SG-PRA is used in areas where moisture may cause a problem with standard steel grilles.

## Standard Construction Details

· Face Plate

1/8" aluminum with 5/16" diameter holes on 7/16" staggered centers and 1" border.

· Sleeve 1/8" aluminum.

· Finish #26 White.

· All Welded Construction.



Note: This submittal is meant to demonstrate general dimensions of this product. The drawings on this submittal are not meant to detail every aspect of the product with exactness. Drawings are not to scale. TITUS reserves the right to make changes without written notice.

605 Shiloh Road • Plano, Texas 75074• 972-212-4800